

HORNET

Gas Station Canopy

Part No: _____

Notes: _____

Project: _____



Performance Data

CRI 80+	Dimming 0-10v, 10% to 100%
CCT 4000K, 5000K	Operating Temp -40°C to +55°C
Lifetime L80 100,000+	IP Rating IP 65

Description

TheHornet is an ideal solution for gas station, car port, and car wash applications. A polycarbonate shetterproof lens is ideal for ruggest environment along with the aluminum housing. The Hornet offers over 130lpw of energy efficient LED lighting and qualifies for DLC premium rebates to maximize your lighting dollars.

Features

- Highly durable powder coat finish over chromatic conversion coating
- Die cast aluminum IP65 housing UL listed with integral heatsink
- 1/2" threaded conduit entry in 4 convenient locations




2 DAY
QUICK SHIP
ON SELECT MODELS

Ordering Information

Example: TS-GWK05 40 5K U BRZ PM

Series	Wattage	Voltage	Wattage	Lens	Color	Accessories
Hornet TS-INC15	150	U 120-277	4K 4000K 5K 5000K	CL Clear	WH White CU Custom	PC Photocell (Included) 10kv 10KV Surge Protector SENS Sensor (call for info)

DIMENSIONS

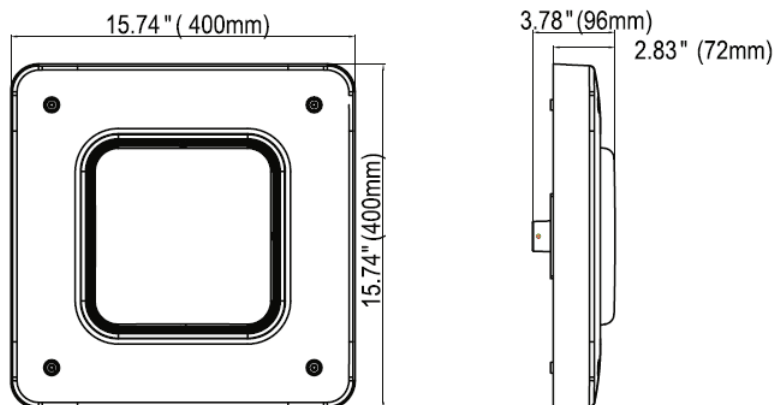

LUMEN OUTPUT

Wattage	Watts	Lumens	Efficiency
150W	150	18,905	126 LPW

LUMEN AMBIENT TEMP MULTIPLIERS

Temperature	Multiple
0c/32f	1.03
10c/50f	1.01
20c/68f	1.00
30c/86f	0.99
40c/106f	0.98

WEIGHT AND PACKAGING SIZE

Wattage	Weight	Box Size LxWxH
150W	13.8 lbs	18.8"x18.9"x5.3"

ELECTRICAL LOAD CALCULATIONS

Wattage	120V	208V	240V	277V
150W	1.25A	0.73A	0.70A	0.55A

LUMEN MAINTENANCE

Operating Hours	0	25,000	50,000	100,000
Percent of Initial	100%	96%	93%	86%