

Warning:

To reduce risk of death, injury or property damage from fire, electric shock, cuts, falling parts and other hazards, service of the equipment must be performed by qualified service personnel. Installation and maintenance must be performed by a person familiar with the construction and operation of this product and hazards involved. All applicable codes and ordinances must be followed. Read and follow all instructions.

Do not assemble runs on floor

DISCONNECT POWER AT ELECTRICAL PANEL BEFORE INSTALLATION


All wiring must be performed by a qualified electrician in accordance with national and local building and electrical codes. This fixture must be suitably grounded for your protection against shock hazards and to assure proper operation. Make sure that the power source conforms to the requirements of this fixture.

Suspension - Single Segment


General Wiring Information

BLACK - Switching Hot
WHITE - Neutral
GREEN - Ground
RED - Constant Hot
PURPLE - Dimming 1
Pink/Gray - Dimming 2

Power Feed End

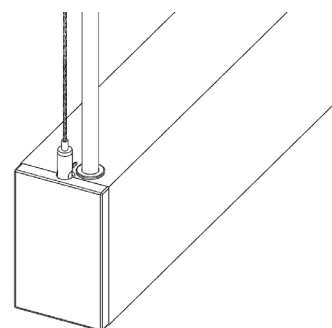


Install Mounting Points

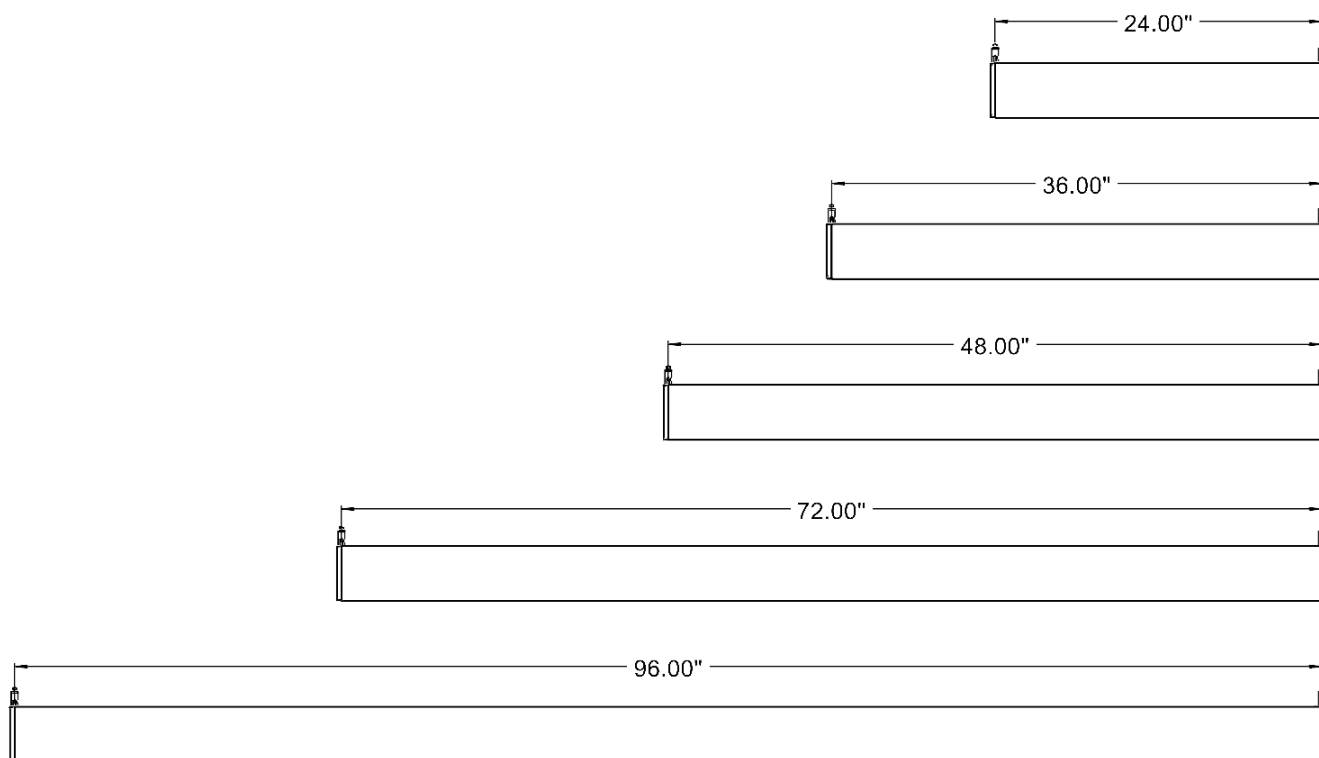

© 2021 Unitelgtg


Install Canopies

1. Install Junction Box (not included), put PF canopy over cord and feed wires into box and ground properly.
2. Install bracket bar, stud, acy and canopy.
3. Non power side install 1/4"-20 threaded stud (not supplied) and install canopy and acy.
4. Attach ACY to fixture gripper AFTER installing the ceiling canopy.

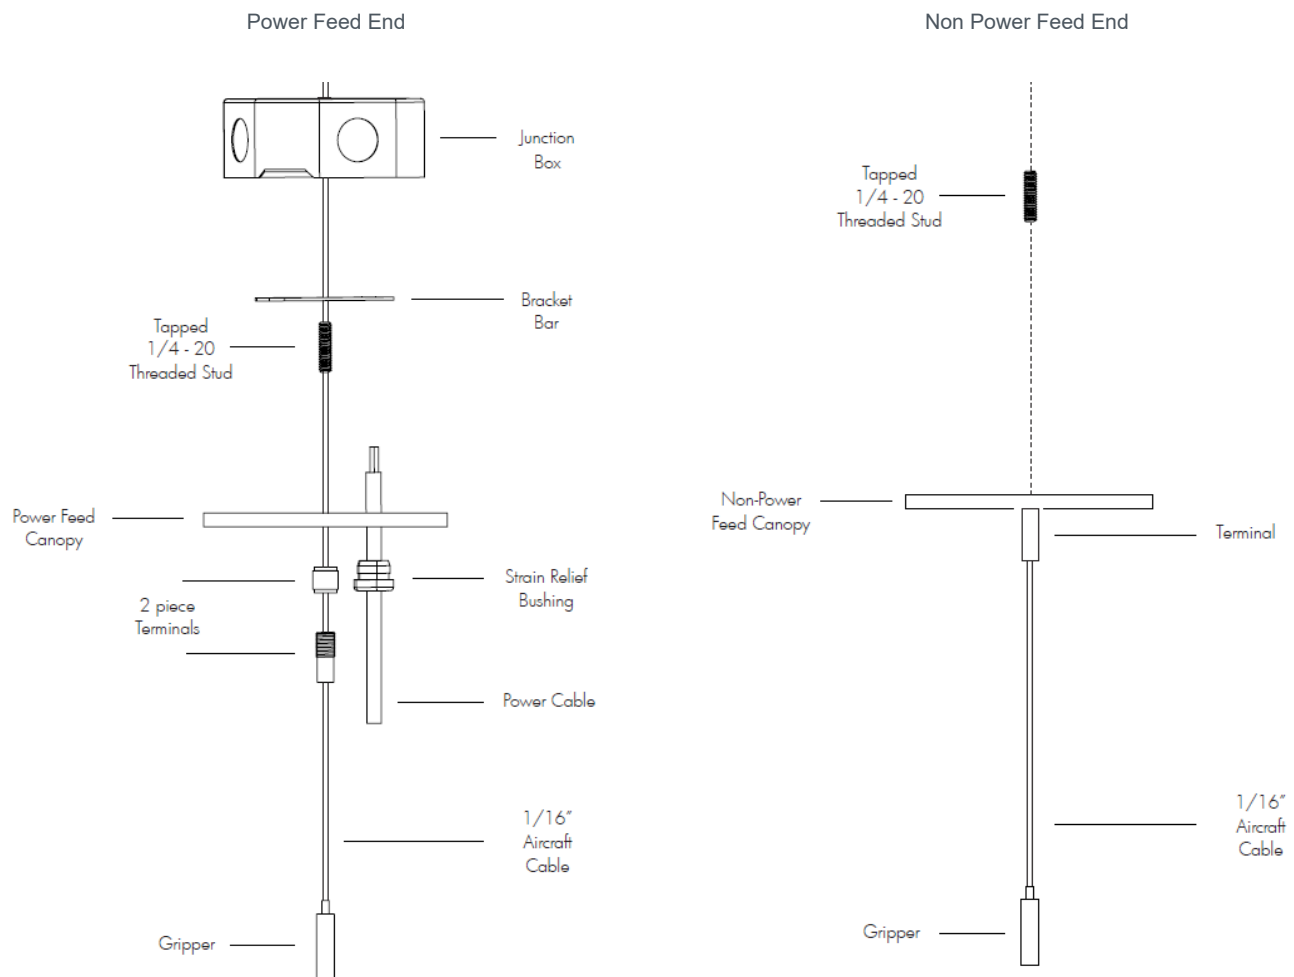


Hang Luminaire

Attach ACY cables into hangars as shown

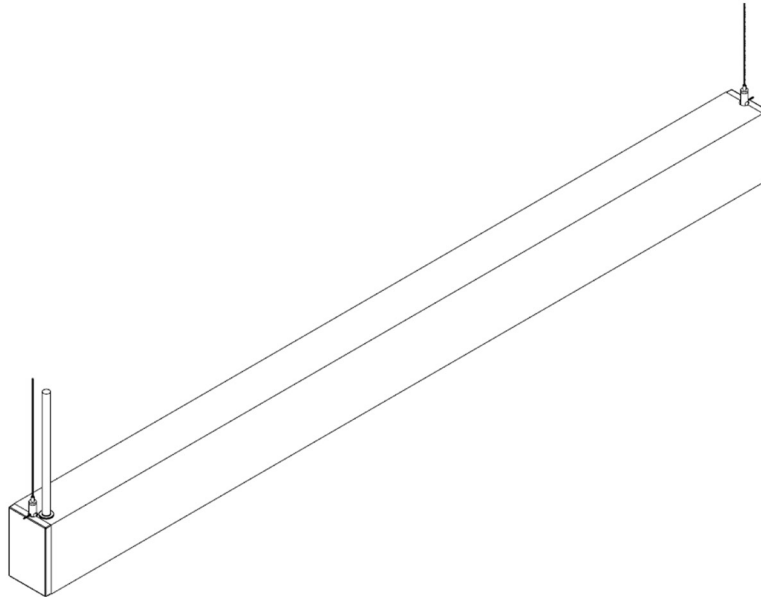

For continuous run, connect power and dimming quick connects, push fixtures together using guide pins and insert philips screws provided as shown in diagram below.

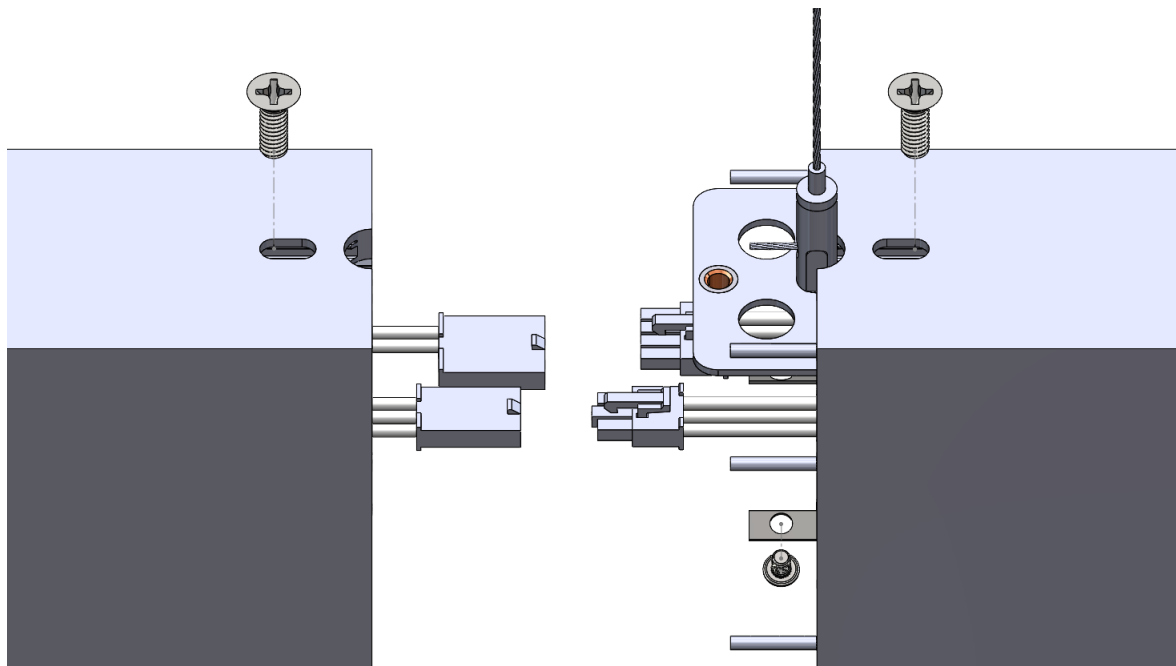

Recessed

Note dimensions for recessed including flanges. Remove lens and gear tray, slide fixture into precut hole making electrical connection, and tighten screws inside to turn and tighten holding bracket until snug.

